

SANIMARIN BEST

STANDARD HEIGHT



MADE IN FRANCE

Perfect blend of modernity and comfort, it is the most luxurious in the range.



Acoustic pressure: 46 dB(A)



Contemporary design



Comfortable



Removable soft close seat



CONTROL SYSTEMS

(refer to page 20 for details)

Comfort




Premium



Luxe



DIMENSIONS (mm)

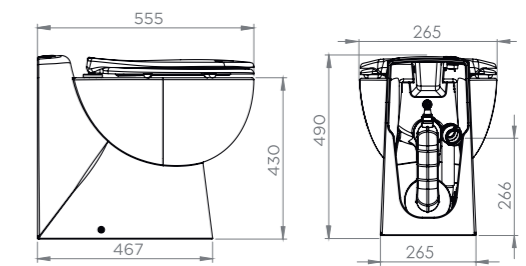

TECHNICAL FEATURES

Discharge parameters	Vertical : 3 m / Horizontal : 30 m
Non return valve	Integrated
Outlet diameter	38 mm or 25 mm
Motor power	300 W (12 V), 360 W (24 V)
Electricity consumption	Dependent upon the control system (details on page 5)
Water consumption	Dependent upon the control system from 1.2 L to 2.4 L
Water use	<ul style="list-style-type: none"> - Onboard freshwater (integrated solenoid valve) or outside pressurised water - Minimum dynamic pressure: 1.7 bar - Recommended pump flow rate 11 L / min

REFERENCES

VOLTAGE SELECTION

SANIMARIN BEST 12V	SNBEST-12V	3308815099620
SANIMARIN BEST 24V	SNBEST-24V	3308815099637

⊕ CONTROL SYSTEM SELECTION

MARINE COMFORT SWITCH	SN-SWITCH1	3308815099644
MARINE PREMIUM DUAL BUTTON	SN-SWITCH2	3308815099651
MARINE LUXE CONTROL PANELWHITE	SN-SWITCH3	3308815099668
MARINE LUXE CONTROL PANELBLACK	SN-SWITCH4	3308815099675
MARINE LUXE CONTROL PANEL	SN-SWITCH5	3308815099682